



Norsat
International Inc.

Innovative Communication Solutions

LNB C-BAND PLL 8000I

SPECIFICATIONS

Noise Temperature at room temp. @CF	20K: 20K typ., 24K Max. 25K: 25K typ., 28K Max. 30K: 30K typ., 32K Max.
L.O. Stability	±500 KHz max.
Phase Noise (SSB) max.	-65 dBc/Hz at 1 kHz -80 dBc/Hz at 10 kHz -95 dBc/Hz at 100 kHz
Input VSWR	2.0 : 1 max.
Output VSWR	2.2 : 1 max.
Gain	62 dB typ., 55 dB min., 70 dB max.
Gain Flatness (over full band)	≤ 5 dB p-p
Output P1dB	+ 5 dBm min.

FREQUENCY BANDS

Frequency Band (GHz)	4.50 - 4.80
L.O. Frequency (GHz)	5.95
IF Frequency (MHz)	1150 - 1450

HOW TO ORDER


8525IF

CONNECTOR	F - 75 Ohm N - 50 Ohm
FREQUENCY	I: 4.5 - 4.8 GHz
NOISE TEMPERATURE	20 - 20K 25 - 25 K 30 - 30 K
L.O. STABILITY	5: ±500 kHz
LNB SERIES #	



DC Power	+ 12V to + 24V DC
Current	250 mA max.
Input (waterproof)	CPR 229G waveguide grooved
Output (waterproof)	F-Connector (75 Ohm) N-Connector (50 Ohm)
Dimensions (L x W x H)	180 mm x 100 mm x 70 mm (7.1 in x 4.0 in x 2.8 in)
Weight	450 g (15.87 oz)
Operating Temperature	- 40 to + 60°C
Storage Temperature	- 50 to + 70°C

MECHANICAL DIAGRAM

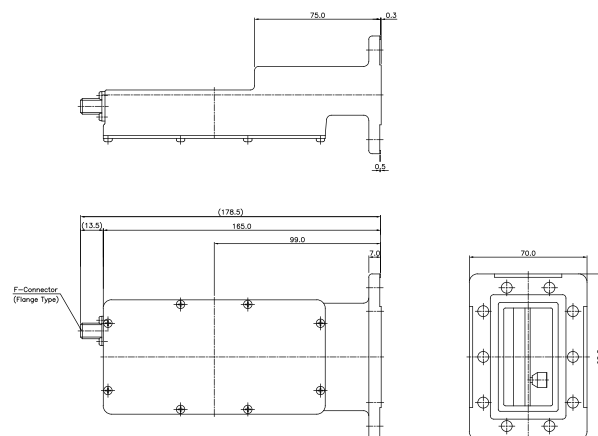

Norsat
International Inc.



sales@norsat.com
www.norsat.com