

INSULATE  
SEAL  
PROTECT

3:1  
SHRINK RATIO



## HEAT SHRINK CABLE SLEEVES

HEAT SHRINK TUBING AND ADHESIVE LINER FOR COAXIAL SPLICE AND CONNECTOR PROTECTION

### FEATURES AND BENEFITS

- 3:1 shrink ratio allows rationalization of sizes to match most commonly used cable connectors, reducing application and material costs
- Available in 1500XS size
- Craft friendly installation
- Exceptional split resistance
- Strong adhesive bond for long term protection
- Selective strippability
- Minimal heat required to produce error free installation without splitting
- Thermochromatic lines change colour to signal waterproof seal
- Continuous operating temperature: -55°C to 110°C

### TYPICAL APPLICATIONS


- Strain relief of coaxial connectors
- Waterproof protection of CATV connectors



## DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				APPLICATION RANGE FOR GENERAL USE		LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W					
	MM	IN	MM	IN	MM	IN	MM	IN	M	IN
1300/1100	33.0	1.30	10.2	0.40	2	0.08	11.5 - 30.0	.45 - 1.2	1.2	48
1500XS	38.1	1.50	10.2	0.40	2	0.08	14.0 - 35.0	.45 - 1.4	1.2	48
1700/1500	43.2	1.70	12.7	0.50	2	0.08	14.0 - 40.0	.55 - 1.6	1.2	48

NOTES:	CANUSA SEAL 1300	COVERS RANGE OF TRADITIONAL 1100/1300 HEAT SHRINK	
	CANUSA SEAL 1500XS	COVERS RANGE OF TRADITIONAL 1300/1500 HEAT SHRINK	** MOST COMMON SIZE **
	CANUSA SEAL 1700	COVERS RANGE OF TRADITIONAL 1500/1700 HEAT SHRINK	

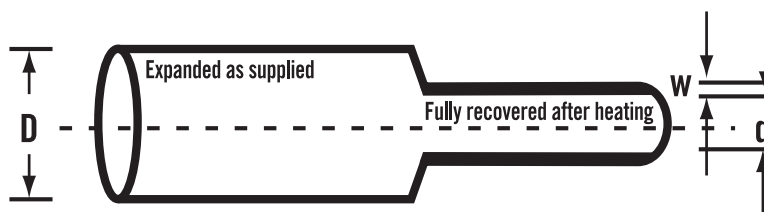

## ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Order Example: CSTV, 1700

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.

REV 0608

USA: 800.422.6872

Canada: 800.845.6808

www.dsgcanusa.com